



# Sealed Lead-Acid Battery

UPG No. D5739

# UB1222

Maintenance-Free

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

## Specification

<b>Nominal Voltage</b>	12 volts		
<b>Nominal Capacity</b>	77° F (25° C)		
20-hr. (0.225A)	2.2 Ah		
<b>Max Discharge Current (5 sec. A)</b>	30A		
<b>Max Charge Current (A)</b>	0.5A		
	1.38 Ah		
<b>Approximate Weight</b>	2.14 lbs (0.97 kgs)		
<b>Internal Resistance (approx.)</b>	80mΩ		
<b>Shelf Life (% of normal capacity at 77° F (25° C))</b>			
3 Months	6 Months	12 Months	
91%	82%	64%	
<b>Temperature Dependency of Capacity</b>	(20 hour rate)		
104° F	77° F	32° F	5° F
102%	100%	85%	65%



## Charge Method (Constant Voltage)

## Cycle Use (Repeating Use)

Initial Current	0.80 A or smaller
Control Voltage	14.5 - 14.9 V

## Float Use


Control Voltage	13.6 - 13.8 V
-----------------	---------------

## Physical Dimensions: in (mm)




**L:** 7.01in (178 mm)  
**W:** 1.4in (35.5 mm)  
**H:** 2.4in (61 mm)  
**TH:** 2.6in (66 mm)  
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


## Terminals



## Discharge Time vs. Discharge Current

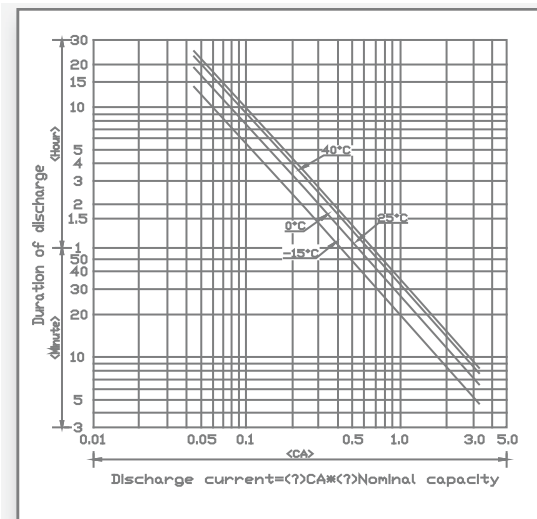


## Discharge Characteristics

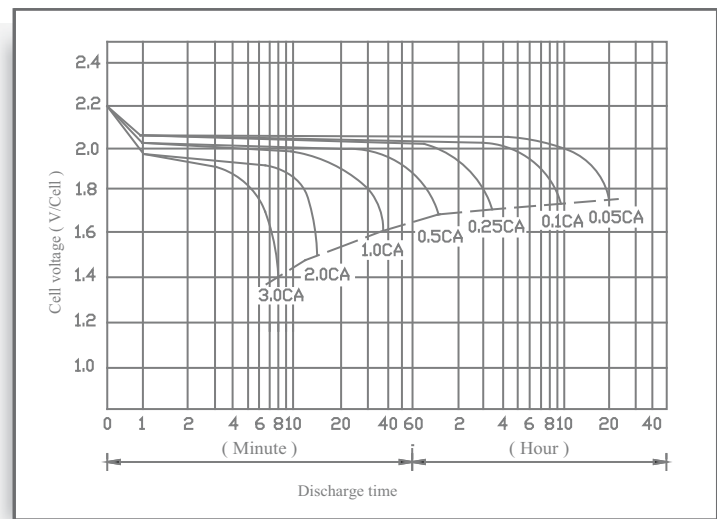


# UB1222

Maintenance-Free


## Battery Charging Characteristics for Cyclic Use

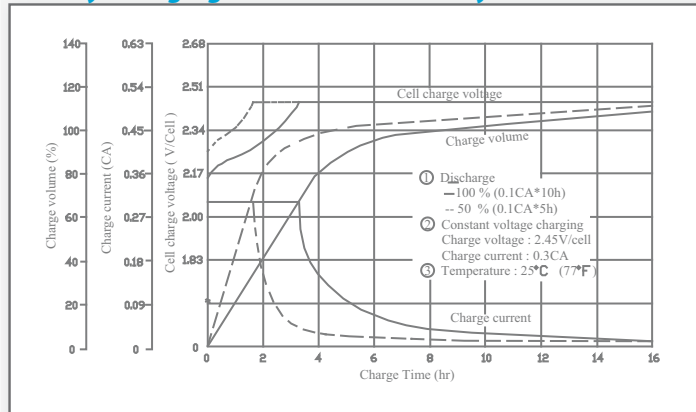


## Battery Charging Characteristics for Standby Use

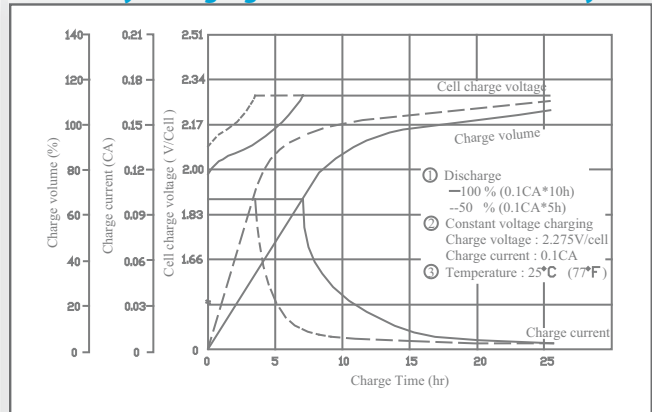


## Shelf Life & Storage

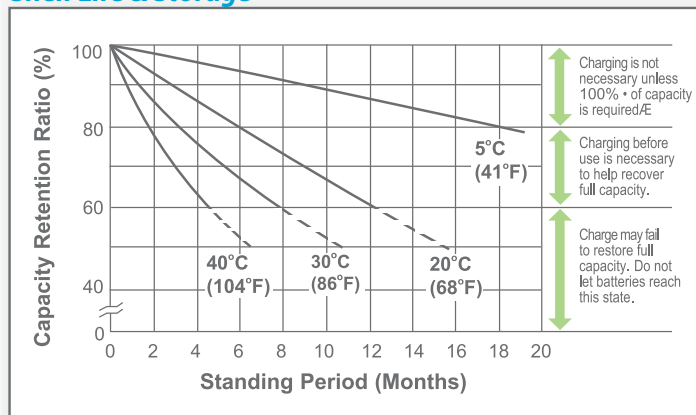


## Cycle Life vs Depth of Discharge

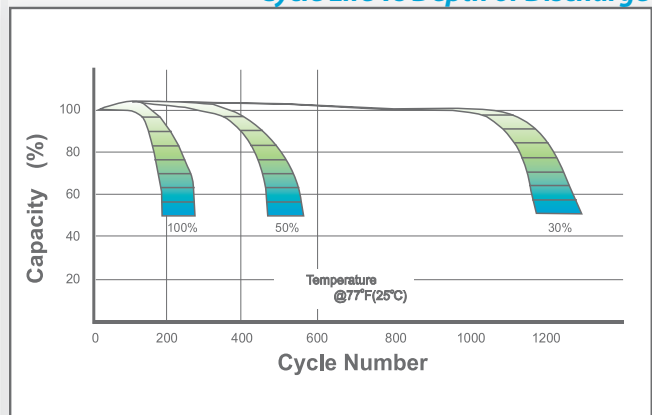

## Open Circuit Voltage vs Residual Capacity

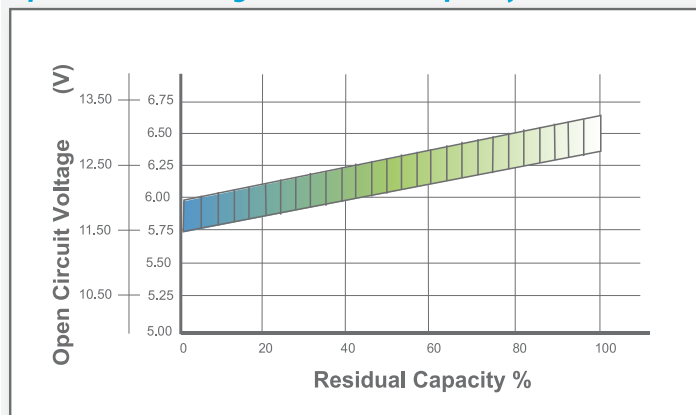

## Effect of Temperature on Capacity

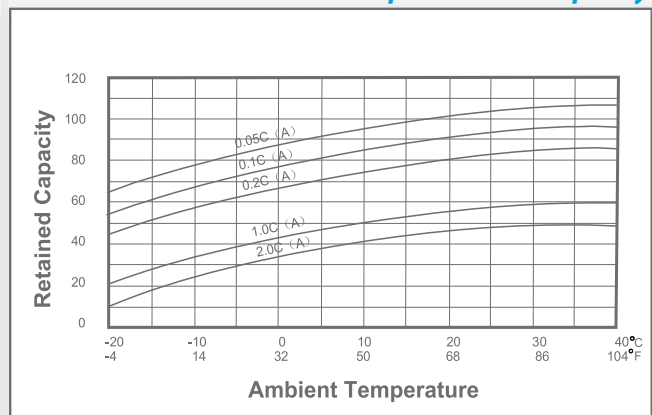

## Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.35C	Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C(77°F)	2.325	2.30~2.35						



Let UPG Power Your Life.

www.upgi.com